

High-energy pulse generation using Yb-doped Q-switched fiber laser based on single-walled carbon nanotubes

This content has been downloaded from IOPscience. Please scroll down to see the full text.

2015 Chinese Phys. B 24 097601

(<http://iopscience.iop.org/1674-1056/24/9/097601>)

View [the table of contents for this issue](#), or go to the [journal homepage](#) for more

Download details:

IP Address: 159.226.35.202

This content was downloaded on 10/12/2015 at 08:25

Please note that [terms and conditions apply](#).

High-energy pulse generation using Yb-doped Q-switched fiber laser based on single-walled carbon nanotubes*

Wang Jun-Li(王军利)^{a,†}, Wang Xue-Ling(汪雪玲)^a, He Bo-Rong(贺博荣)^a, Zhu Jiang-Feng(朱江峰)^a, Wei Zhi-Yi(魏志义)^b, and Wang Yong-Gang(王勇刚)^c

^aSchool of Physics and Optoelectronic Engineering, Xidian University, Xi'an 710071, China

^bBeijing National Laboratory for Condensed Matter Physics, Institute of Physics, Chinese Academy of Sciences, Beijing 100190, China

^cState Key Laboratory of Transient Optics and Photonics, Xi'an Institute of Optics and Precision Mechanics, Chinese Academy of Sciences, Xi'an 710119, China

(Received 3 March 2015; revised manuscript received 2 April 2015; published online 21 July 2015)

An all-fiber laser using a single-walled carbon nanotube (SWCNT) as the saturable absorber (SA) for Q-switched operation in the 1031 nm region is demonstrated in this work. A lasing threshold as low as 17 mW was realized for continuous wave operation. By further increasing the pump power, stable Q-switched pulse trains are obtained when the pump power ranges from 38 mW to 125 mW, corresponding to repetition rate varying from 40.84 kHz to 66.24 kHz, the pulse width from 2.0 μ s to 1.0 μ s, and the highest single pulse energy of 40.6 nJ respectively.

Keywords: Yb-doped Q-switching all-fiber lasers, single-walled carbon nanotubes

PACS: 76.30.Kg, 42.55.Wd, 42.60.Gd, 88.30.rh

DOI: 10.1088/1674-1056/24/9/097601

1. Introduction

Recently, highly stable and compact pulsed fiber lasers have been very appealing because of their stability, free maintenance, flexibility, and low cost.^[1–3] The Yb ion has a rather high absorption cross section, with wide absorption spectrum of 910–980 nm and emission spectrum of 1040–1100 nm, which permits the quantum efficiency as high as 90% and high doping concentration without the concentration quenching effect.^[4–6] Those characteristics mentioned above made the Yb-doped fiber laser become a research hot spot with the most rapid development. Q-switched fiber lasers are of great importance because they can be widely used in many fields, such as remote sensing, range finding, medicine, industry, and fiber communications.^[7–10]

Mostly, the methods for achieving Q-switched fiber laser operation include active modulation and passive modulation. Compared with active Q-switched fiber laser,^[11] passive Q-switched fiber lasers are more compact in structure, convenient in operation, and stable in any environment.^[12–14] Typically, SAs are preferable to generate pulsed laser because of their compact size, and they can be displayed in many forms.^[15] Due to their nature of polarization independence, both SESAMs and carbon nanotubes have potential to generate vector pulses.^[16,17] However, SESAMs require complex and costly clean room-based fabrication systems,^[18] and are inconvenient to achieve all-fiber setup. SWCNTs have significant advantages over SESAMs because they can be easier fabricated, have faster recovery time, and wider operation range

of the wavelength, which makes them ideal SAs for realizing all-fiber Q-switched lasers.^[10,18–21]

Up to now, there have been many reported works on applications of SWCNT materials as SA to achieve mode locking.^[10,19–24] However, there are only a few papers to obtain Q-switched pulse trains in the Yb-doped fiber lasers. Different from the parameters of fixed mode-locked fiber laser,^[24–26] the repetition rate of the Q-switched fiber laser is tunable by varying the pump power without pulse breaking. Unlike the repetition-rate-tunable mode-locked fiber laser with a distributed cavity length at different wavelengths,^[27] the proposed Q-switched fiber laser offers a wider tunable range of repetition rate and exhibits a more flexible method for changing the repetition rate. In contrast to the mode-locked fiber laser based on SWCNTs generating picosecond and femtosecond pulses simultaneously,^[28] the schematic layout of the Q-switched fiber laser is simpler, less expensive, and has higher single pulse energy.

In 2012, Yu *et al.* experimentally demonstrated a Q-switched Yb-doped double-cladding fiber laser based on SWCNTs, which was directly deposited on the core surface of the gain fiber, with a linear cavity and half space structure; a maximum output power of 1.3 W was obtained at the wavelength of 1070 nm, the pulse repetition rate was tuned from 9.1 kHz to 60 kHz with the shortest pulse width around 600 ns.^[29] With an all-fiber ring cavity, Li *et al.* have proved that the SWCNT wall paper can act as a mode locker at a lower pump power and a Q-switcher at a higher pump power of 80 mW, the repetition rate increases from 30 kHz to 50 kHz

*Project supported by the National Key Scientific Instruments Development Program of China (Grant No. 2012YQ120047).

†Corresponding author. E-mail: dispersion@126.com

and the pulse duration decreases from 2.7 μs to 1.0 μs with the increases of pump power, with the maximum output power of 988 μW , corresponding pulse energy of 18.38 nJ.^[21] Furthermore, Ahmad *et al.* performed a stable passive Q-switched YDFL operating at 1073 nm region by using SWCNT as SA, with the repetition rate ranging from 17.1 kHz to 23.6 kHz, pulse width from 3.11 μs to 6.45 μs , and maximum pulse energy of 4.4 nJ at the maximum pump power of 117.5 mW.^[30]

In this work, a Q-switched YDFL in a simple all-fiber ring cavity is proposed and demonstrated, to the best of our knowledge, the highest single pulse energy of 40.6 nJ is obtained based on the SWCNT wall paper in the similar cavity of YDFL. The fabrication method of SWCNT wall paper is called electrical arc discharge technology, and the fabrication process is similar to the works in Refs. [19]–[21].

2. Model and experiment setup

The experimental setup of the proposed Q-switched YDFL is shown in Fig. 1. The Q-switched fiber laser is based on an all-fiber ring laser cavity, which was core pumped with a laser diode emitting at 975.4 nm, whose maximal output power is 667 mW. The pump power was coupled into the cavity through a 980/1030 nm fused WDM. The gain material was a 20-cm-long single mode Yb-doped fiber, whose core absorption was 1200 dB/m at 976 nm with core and cladding diameter of 4.7 μm and 125 μm , respectively. The inline polarization controller was mounted on the single mode fiber HI-1060 to adjust the polarization state of circulating light. A polarization insensitive optical isolator was employed to ensure the unidirectional operation and to avoid any spurious reflected signals to go back to the active Yb-doped fiber. The SWCNT SA wall paper was inserted in the oscillator with the size of $1 \times 1 \text{ mm}^2$ through sandwiching between the two FC/APC fiber connectors. The laser output was taken by a 10% coupler. All the passive components were combined by HI-1060 fiber, and the total cavity length was about 7 m. The fiber laser system is insensitive to vibration and general environment perturbation because of its all-fiber ring-cavity setup.

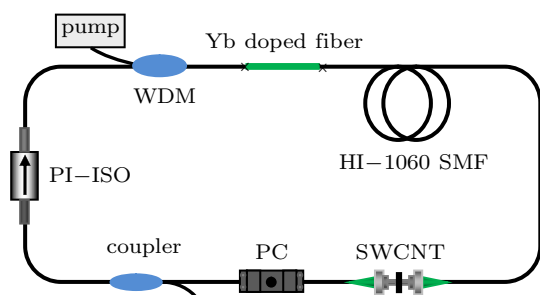


Fig. 1. (color online) Diagram of the experimental setup. WDM: wavelength division multiplexer; SWCNT, single-walled carbon nanostructures; PC, polarization controller; PI-ISO, polarization independent isolator.

3. Results and discussion

In the experiment, the Q-switched was self-starting when the pump power increases to 38 mW, which could be sustained over 125 mW pump power. It is noticed that a further increase of pump power will result in the damage of SWCNT. Figure 2 shows the optical spectrum of the laser, recorded at the maximal permitted pump power, the center operating wavelength was 1032 nm, which was tunable by slightly adjusting the PC, during which the Q-switched operation was still stable. In a certain polarization of stable Q-switched operation, the tuning of wavelength can also be achieved through changing the pump power, but the tuning range is less than 2 nm. As we all know, the Yb-doped fiber laser which operates at 1030–1080 nm for a four-level system can be widely used in the engineering domain.^[31]

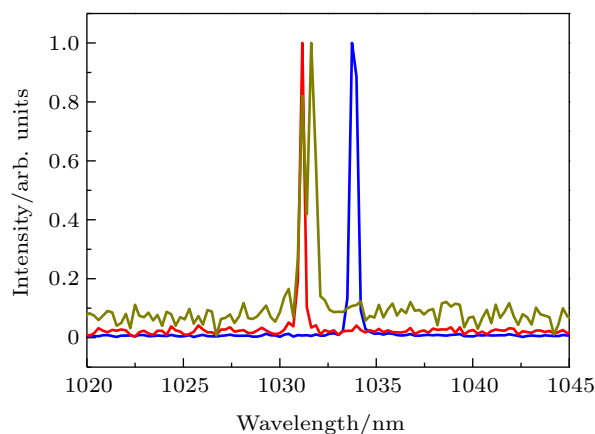


Fig. 2. (color online) Output spectra of the proposed Q-switched YDFL at the pump power of 125 mW with the different polarization state.

The output pulse trains are monitored by a photodetector/sampling oscilloscope (TEK DPO3050) combination after the 10% output port. The continuous wave occurred above the pump power of 17 mW, when the pump power was more than 38 mW, stable Q-switched pulse trains can be obtained without any adjustment of PC. When the pump power was 38 mW, the repetition rate was 40.84 kHz. As the pump power was increased to 125 mW, the repetition rate was elevated to 66.24 kHz. Figure 3(a) shows the typical pulse trains of the Q-switched laser with the pump power of 38 mW with a repetition rate of 40.84 kHz and a pulse width of 2.0 μs . Figure 3(b) shows that with the pump power of 90 mW there is a repetition rate of 56.20 kHz and pulse width of 1.5 μs . Figure 3(c) shows that with the pump power of 125 mW there is a repetition rate of 66.24 kHz and pulse width of 1.0 μs .

The repetition rate and the output power can be varied by increasing the pump power; the relationship of the pump power with them was described in Fig. 4, which clearly shows that this experiment has a rather low threshold of 38 mW pump power for SWCNT to achieve stable Q-switched operation,

and the corresponding output power of 0.61 mW, which increases to 2.69 mW at the maximum permitted pump power of 125 mW. The corresponding repetition rates are basically proportional to the pump power, with its value increasing from 40.84 kHz to 56.20 kHz.

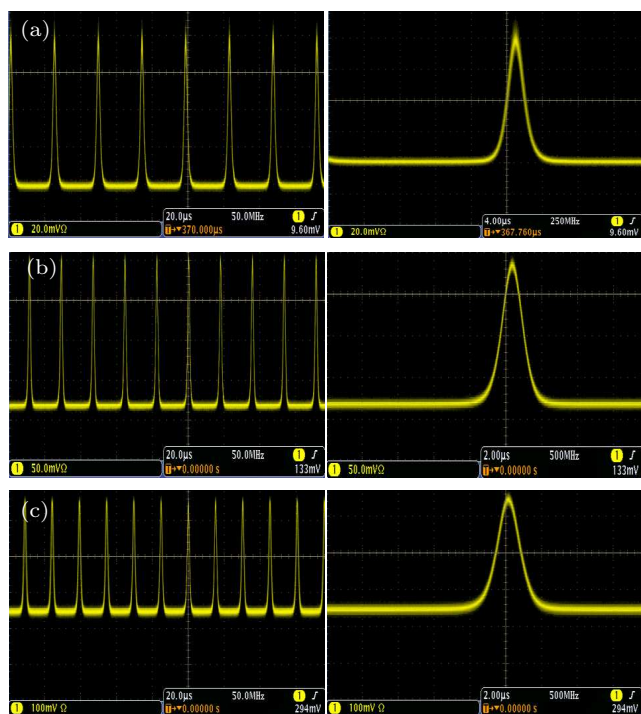


Fig. 3. (color online) Stable pulse trains of the Q-switched lasers at (a) 38 mW, $f = 40.84$ kHz, $\tau = 2.0$ μ s, (b) 90 mW, $f = 56.20$ kHz, $\tau = 1.5$ μ s, and (c) 125 mW, $f = 66.24$ kHz, $\tau = 1.0$ μ s.

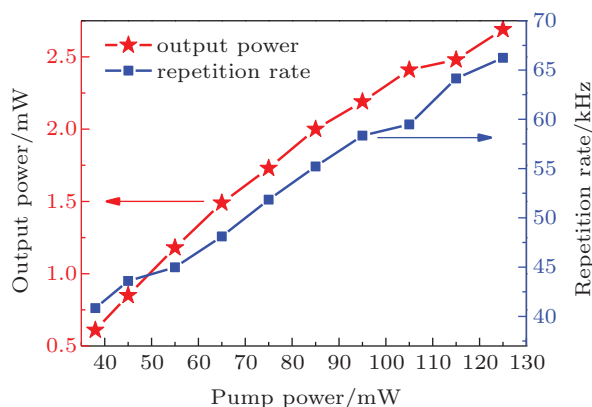


Fig. 4. (color online) The repetition rate and the output power versus the pump power in the Q-switched fiber laser.

The response of the pulse width is inversely proportional to the pump power. As shown in Fig. 5, decreasing from an initial value of 2.0 μ s to 1.0 μ s with the pump power ranging from 38 mW to 125 mW, corresponding to single pulse energy of 14.9 nJ and 40.6 nJ, respectively. The low pump threshold and high pulse energy are mainly owing to a low saturation intensity of the SWCNTs,^[32] compact construction, and strict operation of splicing fiber. In principle, we can reduce the pulse width further by shortening the ring laser cavity, because

the pulse width was directly affected by the cavity length in a passively Q-switched fiber laser.^[33,34]

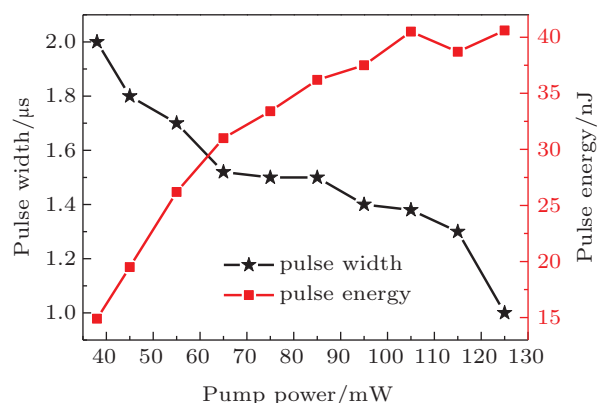


Fig. 5. (color online) Pulse energy and pulse width as a function of pump power in the Q-switched fiber laser.

4. Conclusion

In summary, a compact passively Q-switched YDFL with a 7-m-long ring cavity has been demonstrated and the SA we used as Q switcher is single-walled carbon nanostructures, which has simple fabrication and rather low cost. The stable Q-switched pulse trains are obtained when the pump power is above 38 mW with the repetition rate ranging from 40.84 kHz to 66.24 kHz, pulse width from 2.0 μ s to 1.0 μ s, and pulse energy from 14.9 nJ to 40.6 nJ. The center wavelength we achieved is 1030 nm. To the best of our knowledge, we have achieved a rather low threshold pump power of 38 mW for Q-switched operation, corresponding to the highest single pulse energy (i.e., 40.6 nJ) for the all-fiber Q-switched Yb-doped fiber laser by a SWCNT wall paper. We believe that the higher pulse energy could be obtained by perfecting the performance of SWCNT, using double-clad gain fiber, or optimizing the output coupling ratio.^[35,36]

References

- [1] Dupriez P, Finot C, Malinowski A, Sahu J K, Nilsson J, Richardson D J, Wilcox K G, Foreman H D and Tropper A C 2006 *Opt. Express* **14** 9611
- [2] Leigh M, Shi W, Zong J, Wang J, Jiang S and Peyghambarian N 2007 *Opt. Lett.* **32** 897
- [3] Ancona A, Döring S, Jauregui C, Röser F, Limpert J, Nolte S and Tünnermann A 2009 *Opt. Lett.* **34** 3304
- [4] Lou Q H 2010 *High Power Fiber Lasers and its Applications* (Beijing: Press of University of Science and Technology of China) p. 8 (in Chinese)
- [5] Huang X J, Liu Y Z, Sui Z, Li M Z, Lin H H, Wang J J, Zhao D S and Chen H Y 2004 *High Power Laser and Particle Beams* **16** 1531 (in Chinese)
- [6] Ouyang C M, Chai L, Zhao H, Song Y J, Hu M L and Wang Q Y 2010 *Chin. Phys. Soc.* **59** 3936 (in Chinese)
- [7] Baumgartl M, Jansen F, Stutzki F, Jauregui C, Ortaç B, Limpert J and Tünnermann A 2011 *Opt. Lett.* **36** 244
- [8] Chong A, Buckley J, Renninger W and Wise F K 2006 *Opt. Express* **14** 10095

- [9] Pierrot S, Saby J, Bertrand A, Liegeois F, Duterte C, Coquelin B, Hernandez Y, Salin F and Giannone D 2010 *Conference on Lasers and Electro-Optics, OSA Technical Digest (CD)* (Optical Society of America), paper CFD3
- [10] Kelleher E J R, Travers J C, Sun Z, Rozhin A G, Ferrari A C, Popov S V and Taylor J R *Appl. Phys. Lett.* **95** 1111081
- [11] Chen X, Xiao Q R, Jin G Y, Yan P and Gong M L 2014 *Chin. Phys. B* **23** 064218
- [12] Alvarez-Chavez J A, Offerhaus H L, Nilson J, Turner P W, Clarkson W A and Richardson D J 2000 *Opt. Lett.* **25** 37
- [13] Fan Y X, Lu F Y, Hu S L, Lu K C, Wang H J, Dong X Y, He J L and Wang H T 2004 *Opt. Lett.* **29** 724
- [14] Ahmad F, Harun S W, Nor R M, Zulkepely N R, Ahmad H and Shum P 2013 *Chin. Phys. Lett.* **30** 054210
- [15] Shohda F, Nakazawa M, Mata J and Tsukamoto J 2010 *Opt. Express* **18** 9712
- [16] Mao D, Liu X M and Lu H 2012 *Opt. Lett.* **37** 2619
- [17] Yun L, Liu X M and Han D D 2014 *Opt. Express* **22** 5442
- [18] Liu W J, Han H N, Zhang L, Wang R and Wei Z Y 2014 *J. Mod. Opt.* **61** 773
- [19] Kobtsev S M, Kukarin S V and Fedotov Y S 2011 *Laser Phys.* **21** 283
- [20] Li X H, Wang Y G, Wang Y S, Hu X H, Zhao W, Liu X L, Yu J, Gao C X, Zhang W, Yang Z, Li C and Shen D Y 2012 *IEEE Photon. J.* **4** 234
- [21] Li X H, Wang Y G, Wang Y S, Wang Q J, Zhao W, Zhang Y Z, Ya X and Zhang Y 2013 *International Nanoelectronics Conference* p. 139
- [22] Wang Y G, Chen H R, Wen X M, Wen F H and Jau T 2012 *Opt. Commun.* **285** 1891
- [23] Liu X M, Wang Y G, Li X H, Wang Y S, Zhao W, Hu X H, Zhang W, Wang H S, Yang Z, Shen D Y, Li C, Chen G D and Tsang Y H 2013 *Opt. Fiber Technol.* **19** 200
- [24] Liu X M 2010 *Phys. Prev. A* **81** 023811
- [25] Liu X M, Han D D, Sun Z P, Zeng C, Lu H, Mao D, Cui Y D and Wang F Q 2013 *Sci. Rep.* **3** 2718
- [26] Wang J L, Bu X B, Wang R, Zhang L, Zhu J F, Teng H, Han H N and Wei Z Y 2014 *Appl. Opt.* **53** 5088
- [27] Liu X M, Cui Y D, Han D D, Yao X K and Sun Z P 2015 *Sci. Rep.* **5** 9101
- [28] Han D D, Liu X M, Cui Y D, Wang G X, Zeng C and Yun L 2014 *Opt. Lett.* **39** 1565
- [29] Yu Z H, Song Y R, Tian C C, Li J, Zhang X and Wang Y G 2012 *In: Proceedings of the SPIE High-Power Lasers and Applications VI*, p. 855115
- [30] Al-Masoodi A H H, Ismail M F, Ahmad F, Kasim N, Yusof M, Ahmad H and Sulaiman W H 2014 *Microw. Opt. Techn. Lett.* **56** 1770
- [31] Li P X, Yao Y F, Chi J J, Hu H W, Yang C, Zhao Z Q and Zhang G J 2014 *Opt. Commun.* **332** 187
- [32] Luo Z Q, Zhou M, Weng J, Huang G M, Xu H Y, Ye C C and Cai Z P 2010 *Opt. Lett.* **35** 3709
- [33] Lu F Y, Fan Y X, Wang H J, Hu S L, Dai W T, Xu Z G, Lv K C and Dong X Y 2003 *Chin. J. Lasers* **30** 1057 (in Chinese)
- [34] Liu J, Wu S D, Yang Q H and Wang P 2011 *Opt. Lett.* **36** 4008
- [35] Luo Z Q, Liu C, Huang Y Z, Wu D D, Wu J Y, Xu H Y, Cai Z P, Lin Z Q, Sun L P and Weng J 2014 *IEEE J. Sel. Top. Quantum Electron* **20** 0902708
- [36] Luo Z Q, Huang Y Z, Zhong M, Li Y Y, Wu J Y, Xu B, Xu H Y, Cai Z P, Peng J and Weng J 2014 *IEEE J. Lightw. Technol.* **32** 4077